

09-05-07

DTU

Attorney's Docket No. 042933/298965

PATENT



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re: Natividade Lobo
Appl. No.: 09/625,201
Filed: July 21, 2000
For: PULSE SHAPING WHICH COMPENSATES FOR COMPONENT
DISTORTION

Confirmation No.: 5615

BOX ISSUE FEE
Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

SUBMITTAL OF PRIORITY DOCUMENT

To complete the requirements of 35 U.S.C. § 119, enclosed is a certified copy of Great Britain priority Application No. 9805504.9, filed March 13, 1998.

Respectfully submitted,

Cory C. Davis
Registration No. 59,932

Customer No. 00826
Alston & Bird LLP
Bank of America Plaza
101 South Tryon Street, Suite 4000
Charlotte, NC 28280-4000
Tel Charlotte Office (704) 444-1000
Fax Charlotte Office (704) 444-1111

"Express Mail" mailing label number EV521113148US
Date of Deposit September 4, 2007

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to:
BOX ISSUE FEE, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450

Tamara Stevens

Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with patent application GB9805504.9 filed on 13 March 1998.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., or PLC.

Under the Companies Act does not constitute a new legal entity but merely refers to certain additional company law rules.

Signed



Dated 21 August 2007

Request for grant of a patent

(See the notes on the back of this form. You can also obtain an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference

PAT 98007a GB

2. Patent application number

(The Patent Office will fill in this part)

9805504.9

13 MAR 1998

3. Full name, address and postcode of the or of each applicant (underline all surnames)

NOKIA MOBILE PHONES LIMITED
KEILALAHDENTIE 4
02150 ESPOO
FINLAND

Patents ADP number (if you know it)

5911995004

If the applicant is a corporate body, give the country/state of its incorporation

FINLAND

4. Title of the invention

RADIO TELEPHONE

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

HELEN LOUISE HAWES
NOKIA MOBILE PHONES
PATENT DEPARTMENT
ST GEORGES COURT
ST GEORGES ROAD
CAMBERLEY
SURREY GU15 3QZ

Nokia R&D (UK) Ltd
Patent Department
Ashwood House
Pembroke Broadway
Camberley
Surrey GU15 3XD

Patents ADP number (if you know it)

6945539001

25.11.98

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country	Priority application number (if you know it)	Date of filing (day / month / year)
GB	9801302.2	21.01.98
GB	9801305.5	21.01.98
GB	9801306.3	21.01.98

SEE ATTACHED SHEET

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

YES

I certify this to be a true copy.

G. D. Court
Acting for Comptroller

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	19 pages + 3 pages ANNEX 1
Claim(s)	5
Abstract	1
Drawing(s)	6

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents


Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature  Date 13.3.1998
H L HAWS - Agent for the Applicant

12. Name and daytime telephone number of person to contact in the United Kingdom
- Miss K Jeffery - 01276 419538

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

OUR REF: PAT 98007a GB

APPLICANT: NOKIA MOBILE PHONES LIMITED

TITLE: RADIO TELEPHONE

COUNTRY	PRIORITY APPLICATION NUMBER	DATE OF FILING
GB	9801308.9	21.01.1998
GB	9804600.6	05.03.1998
GB	NOT KNOWN	11.03.1998
GB	NOT KNOWN	12.03.1998

Radio Telephone

In digital radio telephones serial bit streams of data are transmitted over-the-air. The bit streams are used to modulate a carrier. There are several types of modulation scheme used to transmit data carried by the bit stream. For example, in GSM the modulation scheme used is Gaussian Minimum Shift Keying (GMSK) whereas in CDMA systems the modulation technique used is QPSK.

GMSK is a phase modulation that converts a serial bit stream into a phase shift of a carrier wave. The function of the modulation is to convert the incoming serial bit stream into analog signals that modulate the carrier of the transmitter. In GMSK the outgoing phase shift is filtered. The Gaussian function acts as a filter, removing the sharp edges of the digital pulses. Without this filtering the required bandwidth to transmit the signal would be far greater. Even with the gaussian filter it is acknowledged that the GSM system is spectrally inefficient. The GMSK modulation does, however, provide a constant amplitude signal that is power efficient.

In existing CDMA systems a different phase modulation technique, QPSK, is chosen to provide a higher bit rate. In QPSK orthogonal signals are transmitted which double the data rate relative to MSK modulation. In QPSK modulation the outgoing phase shift is Nyquist filtered to provide root raised cosine shaped pulses that increase the spectral efficiency and reduced bit error rate by eliminating intersymbol interference. Although QPSK with root raised cosine pulse shaping is spectrally efficient allowing a high data rate and providing a low BER, it is power inefficient.

The GSM system and existing CDMA systems were designed to meet user needs considered appropriate at their conception. As schemes for third generation systems are being planned the criteria desirable in a telecommunication system that will need to provide for user's needs well into the twenty-first century are being considered.

In third generation systems it will be important that the data rates are high enough to allow the expansion of the telecommunication industry from voice into data applications to continue without reducing the power efficiency below that acceptable for a battery powered terminal. None of the existing modulation schemes allow the data rates to be high enough to support the myriad of data applications that are required without sacrificing bit error rate and /or power efficiency to an unacceptable extent.

According to one aspect of the present invention, there is provided a method for defining the relationship between frequency and amplitude of a pulse function for acting on a data stream for transmission in a telecommunications system in accordance with a predetermined modulation scheme, the method comprising defining desired cost parameters and defining the amplitude of the pulse function over a range of frequencies in dependence on the desired cost parameters.

According to another aspect of the present invention the defined pulse function is generated by a pulse function generator.

According to a further aspect of the present invention, a modulator is provided which comprises means for shaping a data stream in accordance with the defined pulse function.

According to yet another aspect of the present invention there is provided a modulator for providing a signal for transmission in a CDMA telecommunications system in accordance with a modulation scheme, such as MSK or QPSK, wherein the data stream is shaped in accordance with a pulse generator of the present invention prior to modulation with a carrier signal.

According to a still further aspect of the present invention, there is provided a dual mode communication device operable in a first mode for a TDMA telecommunications system in which a channel is a combination of frequency and timeslot and a second mode for a CDMA telecommunications system comprising a

Modulator for modulating a data stream with a carrier signal in accordance with a predetermined modulation scheme common to operation in both the first and second telecommunications systems and being operable in response to respective pulse function generators for shaping the data stream in accordance with the mode of operation of the radio telephone.

According to a yet still further aspect of the present invention, there is provided a dual mode communication device operable in a first mode when a first set of cost parameters are desired and in a second mode when a second set of cost parameters are desired, the radiotelephone comprising a first pulse function generator for converting a data stream in accordance with a pulse function shaped in dependence on the first set of desired cost parameters, a second pulse function generator for converting a data stream in accordance with a pulse function shaped in dependence on the second set of desired cost parameters, and means for selecting the pulse function generator in accordance with the mode of operation of the phone, wherein at least one of the pulse functions is the defined one.

According to another aspect, a dual mode communication device is provided which is operable in a first mode when a first set of cost parameters are desired and in a second mode when a second set of cost parameters are desired, the radiotelephone comprising a modulator for modulating a data stream with a carrier signal in accordance with a predetermined modulation scheme in both the first and second modes of operation, a first pulse function generator for shaping a data stream in accordance with a pulse function shaped in dependence on the first set of desired cost parameters, a second pulse function generator for shaping a data stream in accordance with a pulse function shaped in dependence on the second set of desired cost parameters, and means for selecting the pulse function generator in accordance with the mode of operation of the phone.

According to a further aspect of the present invention, there is provided a method for selecting a modulation scheme for a communication system, the method comprising defining a pulse function for a first modulation scheme for desired cost parameters,

defining a pulse function for a second modulation scheme for the same desired cost parameters, determining the resultant cost parameters for each scheme, and selecting the modulation scheme which gives good resultant cost parameters given the desired ones.

In prior art modulation schemes the pulse functions used to shape the data streams have had a predefined mathematical relationship.

For example:

root raised cosine

$$H(f) = \begin{cases} 1 & |f| < \alpha \\ \sqrt{\frac{1}{2}} (1 - \cos(2\pi(f - (T + \alpha)))) & \alpha < |f| \leq T + \alpha \\ 0 & |f| > T + \alpha \end{cases}$$

for CDMA systems in which QPSK modulation is used and PDC and NADC systems in which DQPSK modulation is used.

Gaussian

$$H(f) = \frac{1}{\sqrt{2\pi}\sigma} e^{-f^2/2\sigma^2}$$

for GSM in which an MSK modulation scheme is used.

With pulse shapes according to the conventional predefined mathematical relationships only one parameter is variable for a given energy level. For the gaussian pulse this is 'sigma' that varies the spread of the pulse allowing the bandwidth to alter at the expense of amplitude. For the root raised cosine the variable is 'alpha' that varies the frequency at which the cosine tail begins. This effects the bandwidth and consequently the power efficiency. The relationship between the cost parameters is well defined so as one improves the other declines in a determined fashion. There is no scope for improving both cost parameters.

Because of the severe restrictions placed on the trade-offs achievable by varying the single variable for the predetermined mathematical functions, the pulse shape most appropriate for each modulation scheme is quite clear. The system designer makes a decision on which modulation scheme based on its strengths and weaknesses and selects the appropriate pulse shape. The single variable of the mathematical function is set to provide an acceptable balance in the defined relationship between the cost parameters.

In the present invention, there is no predetermined mathematical relationship for the pulse shaper. The shape of the pulse is defined in order to meet desired cost parameters. There is freedom to select new pulse shapes that allow many cost parameters to be balanced against each other. The trade-off relationship between two parameters is no longer defined so restricted. This leads to a number of interesting possibilities.

With the present invention it is not necessary for the pulse shape in MSK to be gaussian. Although this particular pulse shape optimizes performance in terms of power efficiency it is not optimal in terms of spectral efficiency. By deviating from a gaussian shape in the frequency domain the balance between BER, power efficiency and bandwidth alters. The same applies to the consequences of deviations from the root raised cosine pulse shape in QPSK modulation.

Pulses in both the MSK system and the QPSK system can be shaped to provide a desired balance between cost functions (e.g. BER, bandwidth, power efficiency, AFC) rather than being at the mercy of existing trade-offs when only the parameters of a given shape pulse such as a gaussian or a root raised cosine are modified. Cost functions are functions which are positive and get smaller the better a system operates.

Simulations demonstrate that by experimenting with the pulse shape used for MSK modulation the spectral efficiency of the GSM system can be enhanced while

retaining an acceptable power efficiency. This allows the existing GSM system to be enhanced to increase data rate using existing frequency bands by dividing existing channels, a channel being a combination of frequency band and timeslot.

The present invention suggests that the pulse shape in a modulation scheme can be used to alter the cost functions (parameters) of the scheme. This can be utilised in a number of ways. It allows existing modulation schemes to be looked at afresh with new pulse shapes to obtain performances that are better than those possible at present with conventional pulse shapes. By removing the strong links between particular modulation schemes and the current problems, e.g. MSK - spectral inefficiency; QPSK - power inefficiency, the modulation schemes for particular systems could be selected on a different basis.

For example, by implementing CDMA using a MSK modulation scheme with a suitable pulse shape to meet the required cost function i.e. (CDMA criteria) a dual mode GSM CDMA terminal could be constructed using a single modulator. The pulse shape would be likely to differ for each system as the cost function (desired parameters) may also differ.

The invention also allows problems with existing systems to be ameliorated. The major problem with the existing GSM system is that as data users increase they will occupy an increasing fraction of available channels. This is because if data transmission rates are to match expectations, more than one channel is needed to transmit data. If the data rate requirements are met, as the fraction of data users increases, the capacity of the system decreases. If GSM is to continue to support both voice and data users, without grinding to a halt, the number of operable channels needs to increase.

This increase in operable channels can be achieved by modifying the pulse shape in the MSK modulation scheme to reduce the relevant cost function i.e. bandwidth or bit error rate.

to support a faster data rate within existing channels, a channel can be divided either in time so that more than one frame is sent in a single time slot. Alternatively the channel could be divided in frequency to allow more than one frequency band to be sent in an existing (wider) frequency band. A data user could then send data at a faster rate by using 'subchannels' within a channel allocated by the system without reducing the capacity of the system. Without the subchannels the only way the data rate could be increased would be by using more than one channel to transmit data. For every additional channel utilised, there would be a corresponding reduction in the number of channels available, for both voice and data transmissions.

The two types of user, fast data rate and slow data rate could co-exist in the same system with only minimal changes to the GSM infrastructure (e.g. software). The proposed half rate GSM could be used, in which a half rate channel (where only one slot every other frame is dedicated per subscriber) is used for slow data rate users. This arrangement would accordingly allow GSM to evolve to become useful as a high data rate system, extending its practical life. In GSM there are 8 timeslots and 175 frequency bands. By dividing each channel into two up to twice the users could be accommodated on the existing channel. This would significantly effect the future data user capacity of the system

As well as using MSK modulation in a CDMA system, pulse shaping would allow the cost functions in a QPSK modulation scheme to be optimized. This would allow the power efficiency to increase with perhaps some resulting increase in the BER and decrease in spectral efficiency. The freedom to select a pulse shape unconstrained by conventional root raised cosines and gaussian pulses allows the cost function in any of these modulation schemes to be optimized to meet desired parameters. This provides greater freedom in designing a third generation or enhanced second generation system, having desired parameters that are considered as set of weighted costs in an optimization calculation.

By experimentation, optimization could be tried for any modulation scheme and the results examined to determine the 'best' optimization for a predetermined cost function.

Embodiments of the invention will now be described, by way of example, with reference to the accompanying drawings, of which,

figure 1 is a CDMA transmitter according to an embodiment of the present invention,

figure 2(a) is a GSM transmitter according to an embodiment of the present invention,

figure 2(b) shows the GSM frame structure,

figure 3 is an enhanced GSM transmitter according to an embodiment of the present invention,

figure 4 is a dual mode GSM/CDMA transmitter according to an embodiment of the present invention, and

figure 5 is a receiver which can be used in accordance with the present invention.

A method of adaptively shaping a pulse function depending upon cost functions, according to an embodiment of the present invention is described below.

As mentioned above, only the Gaussian and root raised cosine pulses have been considered for use in modulators of telecommunications systems to date. Laurent has suggested that a Gaussian pulse can be approximated by the superposition of AM pulses ($C_0, C_1 \dots$ etc.), these pulses being a fixed family of pulses which are functions of cos and sin. In the present invention, a totally different approach has been taken, as is outlined below.

Laurent's theory that a pulse can be approximated by the superposition of components has been implemented. However, instead of using this theory to approximate existing Gaussian pulses based on the fixed function components, Laurent's superposition expansion has been used as the basis of ascertaining a pulse shape which meets the criteria required by a particular communications system. This may be done as follows.

Firstly, the fixed function components in Laurent's superposition expansion are replaced by one or more functions representing respective unknown pulse components. Then cost functions are looked at (e.g. BER, bandwidth, amplitude, AFC). That is, the errors from the values that the particular system requires are considered. The weightings of the cost functions can be varied so as to tailor the results. Values for each function are then determined, for example using an optimiser, which minimise these cost functions and thus give a pulse shape which meets the specified system requirements.

Preferably two functions are used as this provides more optimal pulse shaping than just using one function.

More specifically, the method can be implemented as follows :

Firstly, Laurent's formula is considered. According to Laurent's formulation:

$$S_{NT+\Delta T} = \sum_{K=0}^{M-1} \sum_{n'=0}^{L_K-1} J^{A_{K,N-n'}} C_{K,n'T+\Delta T} \quad \text{- Equation (1)}$$

where $S(t)$ is the signal at time t $A_{K,N} = \sum_{n=-\infty}^N a_n - \sum_{i=1}^{L-1} a_{N-i} \cdot \infty_{K,i}$

$$A_{K,N} = A_{O,N} - \sum_{i=1}^{L-1} a_{N-i} \cdot \infty_{K,i}$$

$$C_K(t) = S_0(t) \times \prod_{i=1}^{L-1} S_{i-L \alpha_K, i}(t) \quad (0 \leq K \leq M-1)$$

Instead of using Laurent's pulses, $C_{K,n}$, we wish to use an alternative pulse, PULSE $K_{K,n}$, which is as yet unknown, but for which we wish to determine an appropriate value depending upon requisite error function requirements.

Substituting this in equation 1 gives :

$$S_{NT+\Delta T} = \sum_{K=0}^{M-1} \sum_{n'=0}^{L_K-1} J^{A_{K,N-n'}} \text{PULSE}_{K,n'T+\Delta T} \quad \text{- Equation (2)}$$

where $J = \sqrt{-1}$

As mentioned above, PULSE is unknown as yet, but is, in this embodiment it is read, non zero and of maximum length 8.

In this embodiment we choose to use two components (PULSE [0] and PULSE [1]) to build up S. Hence $M = 2$. Expanding equation (2) for $M=2$ and replacing the function A_K with a function of the bit streams $\alpha_1, \alpha_2, \dots$, gives :

$$\begin{aligned} J^{A_{0,N-5}} & (J^{(\alpha_{N-4} + \alpha_{N-3} + \alpha_{N-2} + \alpha_{N-1} + \alpha_N)} \text{Pulse [0]} [\delta T] + \\ & J^{(\alpha_{N-4} + \alpha_{N-3} + \alpha_{N-2} + \alpha_{N-1})} \text{Pulse [0]} [T + \delta T] + \\ & J^{(\alpha_{N-4} + \alpha_{N-3} + \alpha_{N-2})} \text{Pulse [0]} [2T + \delta T] + \\ & J^{(\alpha_{N-4} + \alpha_{N-3})} \text{Pulse [0]} [3T + \delta T] + J^{\alpha_{N-4}} \text{Pulse [0]} [4T + \delta T] + \\ & \text{Pulse [0]} [5T + \delta T] + J^{(-\alpha_{N-5})} \text{Pulse [0]} [6T + \delta T] + \\ & J^{(-\alpha_{N-5} - \alpha_{N-6})} \text{Pulse [0]} [7T + \delta T] + \end{aligned}$$

$$\begin{aligned}
& J^{(-\alpha_{N-5} - \alpha_{N-6} - \alpha_{N-7})} \text{Pulse } [0][8T + \delta T] + \\
& J^{(\alpha_{N-4} + \alpha_{N-3} + \alpha_{N-2} + \alpha_{N-1} + \alpha_N - \alpha_{N-1})} \text{Pulse } [1][\delta T] + \\
& J^{(\alpha_{N-4} + \alpha_{N-3} + \alpha_{N-2} + \alpha_{N-1} - \alpha_{N-2})} \text{Pulse } [1][T + \delta T] + \\
& J^{(\alpha_{N-4} + \alpha_{N-3} + \alpha_{N-2} + \alpha_{N-3})} \text{Pulse } [1][2T + \delta T] + \\
& J^{(\alpha_{N-4} + \alpha_{N-3} - \alpha_{N-4})} \text{Pulse } [1][3T + \delta T] + \\
& J^{(\alpha_{N-4} - \alpha_{N-5})} \text{Pulse } [1][4T + \delta T] + J^{(-\alpha_{N-6})} \text{Pulse } [1][5T + \delta T] + \\
& J^{(-\alpha_{N-5} + \alpha_{N-7})} \text{Pulse } [1][6T + \delta T]
\end{aligned}$$

-Equation (3)

Since α denotes a bit, it must be plus or minus 1. Hence each term in equation (3) can be identified as to whether it is real or imaginary (assuming that the pulse function is real).

eg: Taking the first term of the equation :

$$\begin{aligned}
& J^{(\alpha_{N-4} + \alpha_{N-3} + \alpha_{N-2} + \alpha_{N-1} + \alpha_N)} \\
& \alpha_{N-4}, \alpha_{N-2}, \alpha_N = \text{odd} \rightarrow \text{imaginary} \\
& \alpha_{N-3}, \alpha_{N-1} = \text{even} \rightarrow \text{real.}
\end{aligned}$$

Hence it is possible to calculate the absolute value of this expression as a function of the bits (α_s). A decision to be made is what α is sent at time N. (In an ideal system this will be the signal received at baseband).

Looking at equation 3 (e.g. for a simple receiver), it can be deduced that the bit α_{N-4} is transmitted at time $(N+4)T$ as it is on its own. It is imaginary, and the interfering (ie other imaginary) pulses must be taken into account. The real terms in this expression can be totally ignored both for the interfering terms and the absolute value of the pulses.

The interference should be minimised. The BER performance can, for example, be improved by making the terms $\text{Pulse}[0]$ at $(N+4)T$ large compared to the absolute value of all the other terms.

Therefore, given an α sequence of :

$$\{\alpha_N, \alpha_{N-1}, \dots, \alpha_{N-7}\} = \{1, 1, 1, 1, 1, 1, 1\},$$

the absolute value of the pulse at time ΔT can be calculated in terms of the unknown pulses. The absolute value of the interfering terms at time ΔT can also be calculated in terms of the unknown pulses. This is performed for every possible combination of 1,-1 for α_N to α_7 (ie all $2^8 = 256$ possibilities). For each possibility an expression both for interfering terms and absolute value are obtained.

In this embodiment, the pulse is required to meet certain criteria with regard to power, BER, AFC and bandwidth. Hence, error functions for these are determined.

Given an oversampling of 8, ΔT can take on the following values :

$$\Delta T = \{0, \frac{T}{8}, \frac{2T}{8}, \frac{3T}{8}, \dots, \frac{7T}{8}\}$$

Clearly, the oversampling rate can be altered depending upon the level of pulse sampling required.

The amplitude and BER costs are calculated for ΔT taking each of the above values. The total cost for each is the addition of all the 8 expressions obtained over the possible sequences.

Cost (Error) Functions

(i) Amplitude Error Function

Given a constant amplitude of 1, the error in amplitude can be given by :

$$\{ \text{absolute value}^2 - 1^2 \}^2$$

(ii) BER Error Function

To calculate this, the amount of noise needs to be determined. This is given by :

$$\{ \text{absolute value of interfering regions} \}^2$$

(iii) Energy Error Function

Required energy - sum of the square of the sample points.

(iv) Bandwidth Error Function

In order to estimate the bandwidth of the pulses, the derivative of the pulse functions (which at this stage are still unknown) are required. This derivative can be approximated as being the difference between two adjacent pulse values. The bandwidth for a pulse, is given by :

$$\text{sum} \quad \{ \text{derivative at the sample points} \}^2$$

This can be determined as follows :

A pulse width of $8T$ has been assumed and we have oversampled the pulse by 8.
According to Laurent :

Pulse $[0][t]$ is non zero for $0 \leq t \leq 9T$

Pulse $[1][t]$ is non zero for $0 \leq t \leq 7T$

The unknown pulses are :

$$\text{Pulse}[0][mT + \frac{nT}{8}] \quad \text{for} \quad \begin{matrix} m = 0, 1, 2, \dots, 8 \\ n = 0, 1, 2, \dots, 7 \end{matrix}$$

$$\text{Pulse}[1][mT + \frac{nT}{8}] \quad \text{for} \quad \begin{matrix} m = 0, 1, 2, \dots, 7 \\ n = 0, 1, 2, \dots, 7 \end{matrix}$$

For convenience denote :

$$\text{Pulse}[0][mT + \frac{nT}{8}] \quad \text{by} \quad x_{0, m \cdot 8 + n}$$

$$\text{Pulse}[0][mT + \frac{nT}{8}] \quad \text{by} \quad x_{1, m \cdot 8 + n}$$

Then for example :

$$\text{Pulse}[0][2T + \frac{3T}{8}] = x_{0, 19}$$

$$\text{Pulse}[1][2T + \frac{3T}{8}] = x_{1, 19}$$

Adjacent sample points have adjacent numbers and the set of unknowns becomes :

$$x_{0, i} \quad \text{where} \quad i = 0, 1, 2, \dots, 71$$

and

$$x_{1, i} \quad \text{where} \quad i = 0, 1, 2, \dots, 55$$

Consequently, the approximate bandwidths for pulse [0] is as follows :

$$\text{Pulse [0]} : \text{Sum} \frac{(x_{0, i+1} - x_{0, i})^2}{T/8} \quad \text{for } i = 0 \text{ to } 70$$

-(a)

In the present embodiment, the bandwidth for the second component is to be determined, then a similar expression needs to be determined for PULSE [1]. This is as follows :

$$\text{Pulse [1]} : \text{Sum} \frac{(x_{1, i+1} - x_{0, i})^2}{T/8} \quad \text{for } i = 0 \text{ to } 54$$

-(b)

Total bandwidth for the pulse composed of the two components = (a) + (b)

The pulse can be specifically designed based on system requirements by weighting the above error functions (for example 0.3 for power, 0.3 for BER and 0.4 for bandwidth or if a system requires only, for example, bandwidth considerations, 0 for power and BER and 1 for bandwidth). More weight can be added to whatever is causing a problem. The only restriction is that the total weighting must equal + 1.

Now the total error function is expressed in terms of the unknowns, namely, $x_{0,i}(i=0 \text{ to } 71)$ and $x_{i,j}(i=0 \text{ to } 55)$. To determine appropriate values for the unknowns, and thus deduce the pulse shapes, this expression is minimised using a conventional off-the-shelf optimiser, for example.

The implementation of a pulse function defined in dependence on desired cost parameters (eg by the above method) will now be described.

Figure 1 illustrates a Code Division Multiple Access (CDMA) transmitter. CDMA conventionally comprises a frame made up of a dedicated physical data channel (DPDCH) and a dedicated physical control channel (DPCCH). A bit sequence 101 to be transmitted is input to a frame builder 102 of the transmitter, which puts the bits in the appropriate part of the frame (i.e. in the DPDCH).

The bit stream is then spread across the spectrum by the Gold Code Encoder. This Gold Code Encoder 103 operates as follows.

Given $\{C_0, C_1, \dots, C_{N-1}\}$ bit stream

and $\{f_0 f_1, \dots, f_{M-1}\}$ frame sequence
(i.e. M symbol bits)

the output of the Gold Code Encoder 103 is a sequence with $N \times M$ terms having the following elements :

$$\{f_0C_0, f_0C_1, \dots, f_0C_{N-1}, f_1C_0, \dots, f_1C_{N-1}, \dots, f_{M-1}C_{N-1}, \dots, f_{N-1}C_{M-1}\}$$

Hence, there are MN chips to modulate.

A modulator 104 modulates these MN chips output by the Gold Code Encoder 103 on to a carrier, which is output by clock 105. The modulator 104 may be a QPSK modulator as is generally used in CDMA systems such as IS95. However, in this preferred embodiment, the modulator is a continuous phase modulator such as that used in MSK modulation. The bandwidth of the signal output by the modulator 104 is directly related to the spectrum of the pulses that are used to make up a lookup table 106. Conventionally, in CDMA, this lookup table would comprise data defining a root raised cosine. However, in this embodiment of the present invention, the lookup table defines a pulse whose shape has been optimised on the basis of cost (error) functions, as explained above. The output of the modulator 104 is input to a digital to analogue converter 107. The analogue signal is then reconstructed by a reconstruction filter 108. A reconstruction filter might typically comprise a switch capacitor filter for performing some spectral shaping and an analogue filter, such as an RC filter network, for mainly dealing with residual shaping. Once the signal has been reconstructed, it is input to a power amplifier 109, which amplifies the signal for transmission by the antenna 110.

Figure 2a illustrates a GSM transmitter. GSM conventionally comprises a frame structure as shown in Figure 2b. A bit sequence 201 to be transmitted is input to a frame builder 102 of the transmitter, which puts the bits in the appropriate portion of a burst within a time slot of a TDMA frame. The bit stream is then forwarded to a modulator 204. Conventionally this modulator would be a GMSK modulator. However, in this preferred embodiment the signal is not put through a Gaussian filter. Instead, a lookup table 206 defines a pulse function whose shape has been

optimised on the base of the error functions as explained above. The lookup table will comprise 2^T x the number of samples per second.

A clock 105 provides the carrier signal as is conventional.

The modulated signal is input to a digital analogue converter 207. This analogue signal is then reconstructed by reconstruction filter 208. As with the CDMA transmitter, this filter might typically comprise a switch capacitor filter for performing some of the spectral shaping and an analogue filter, such as an RC filter, for mainly dealing with residual shaping. Finally, the signal is amplified by a power amplifier 109 and is transmitted via antenna 210.

For the further evolution of GSM (EDGE), it has been proposed to improve the data rate by 3 by changing the modulation scheme. The present invention enables the data rate to be increased by designing a pulse which meets the appropriate cost functions. Consequently, the existing infra-structure can be used with its channels divided either in frequency or time.

Figure 3 shows an enhanced GSM transmitter which could be used in such a system. This transmitter is similar to present GSM transmitters, and in this embodiment the modulator 304 is an MSK modulator. However, this enhanced GSM transmitter comprises 2 lookup tables 306a and 306b, which define different pulse functions for acting on the bit sequence 301. Lookup table 306a comprises data defining a pulse function which can act on speech with the current data rate of 9.6 kilobits per second. The data of this lookup table could correspond to the Gaussian curve, so that it provides the same modulation (ie GMSK) as is currently used in GSM. However, preferably, it comprises data defining a pulse function according to the present invention, for example one which is optimised for a more stringent cost function.

Lookup table 306b, on the other hand, comprises data which defines a pulse function for acting on the bit sequence 301 for data applications. The pulse function

is designed based on different cost functions from the ones required for the voice applications, as clearly data applications require a much improved data rate. Switch 311 provides connection between the modulator and the appropriate lookup table for the application required.

As mentioned previously, flexibility of choice of modulation scheme for a particular telecommunication system has been restricted due to the modulation schemes having certain efficiencies and inefficiencies tied to them. However, by removing these ties by providing a suitable pulse shape which meets the cost function requirements of a certain system, the present invention provides greater flexibility.

Figure 4 shows a dual mode GSM/CDMA transmitter. This transmitter is provided with a common modulator 404. This is possible because the cost function restraints of a particular modulation scheme have been reduced by the transmitter having two lookup tables 406a and 406b, which, in this embodiment respectively define pulse shapes which meet the cost function requirements of GSM and CDMA. As can be seen a number of components can be used for both GSM and CDMA operations and where two components are required a switch is included, the switch between them depending on the operation of the transmitter. For example, if in CDMA mode the bit sequence 401 would need to be encoded by a gold code encoder 403. Hence the switch would make a connection with this gold code encoder, whereas if in GSM mode it would switch straight through to the modulator. Similarly if in GSM mode, the pulse shaping is provided by GSM lookup table 406a and switch 411 provides a connection so a bit sequence can be shaped according to the data in this lookup table. Finally switch 412 is provided so that the power amplifier is connected to the filter network for the appropriate mode of operation of the transmitter.

Figure 5 shows a typical receiver. A received signal is put through at least 1 IF stage 501 to reduce its frequency to a base band frequency and then the signal is split into its I and Q components and the carrier is removed from the signal, using mixers 502a and 502b and low pass filters 503a and 503b. The signal is then converted from an analogue signal into a digital signal by the A/D converters 504a


nd 504b and forwarded to the Demodulator stage 505. At this stage, demodulation, any equalisation, and decoding etc is performed.

The present invention includes any novel feature or combination of features disclosed herein either explicitly or any generalisation thereof irrespective of whether or not it relates to the claimed invention or mitigates any or all of the problems addressed.

In view of the foregoing description it will be evident to a person skilled in the art that various modifications may be made within the scope of the invention.

Different Pulses Bandwidth set to 0.5


```
ListPlot[optsol[[2]], PlotJoined -> True, PlotRange -> All]
```

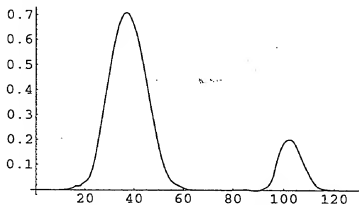

```
{AmplitudeCost, BERCost, BandWidthCost, ApproxBandWidth} /. Thread[var -> initsol]
{0.000347123, 1.34979×10-7, 0.644455, 1.30278}
```



```
{AmplitudeCost, BERCost, BandWidthCost, ApproxBandWidth} /.
Thread[var -> optsol[[2]]]
{0.0360764, 0.000561778, 0.00665709, 0.581591}
```

```
ListPlot[{Re[tom3], Im[tom3]} // Transpose, PlotJoined -> True, AspectRatio -> 1]
```

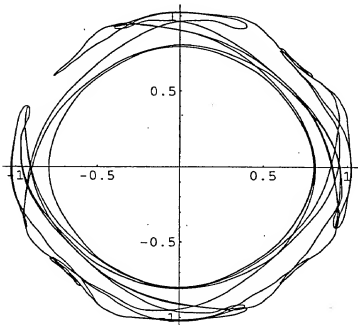

- Graphics -


```
ListPlot[
{Scale, 20 Log[10, Abs[pulse0Fourier] / Abs[pulse0Fourier[[1]]]]} // Transpose //
Take[#, 64]&, PlotJoined -> True, PlotRange -> All,
AxesLabel -> {"1/T", "dB"}]
```

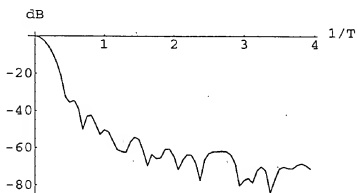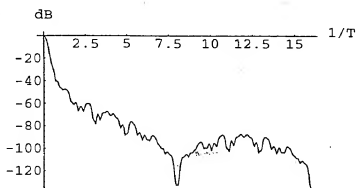

- Graphics -

Different Pulses Bandwidth set to 0.6

```
ListPlot[optsol[[2]], PlotJoined -> True, PlotRange -> All]
```

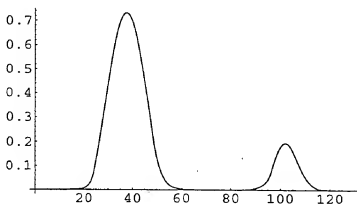


- Graphics -



```
{AmplitudeCost, BERCost, BandwidthCost, ApproxBandWidth} /. Thread[var -> initsol]
{0.000347123, 0.000188478, 0.493899, 1.30278}
```

```
{AmplitudeCost, BERCost, BandwidthCost, ApproxBandWidth} /.
Thread[var -> optsol[[2]]]
{0.0194813, 0.00970054, 0.00481859, 0.669416}
```

```
ListPlot[{Re[tom3], Im[tom3]} // Transpose, PlotJoined -> True, AspectRatio -> 1]
```



- Graphics -

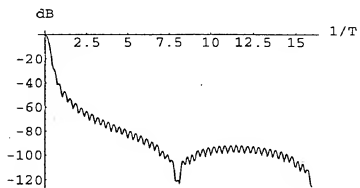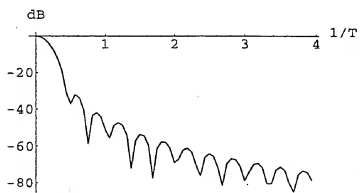

claims

1. A method for defining the relationship between frequency and amplitude of a pulse function for acting on a data stream for transmission in a telecommunications system in accordance with a predetermined modulation scheme, the method comprising:
 - defining desired cost parameters; and
 - defining the amplitude of the pulse function over a range of frequencies in dependence on the desired cost parameters.
2. A method according to claim 1 wherein the amplitude of the pulse function over a range of frequencies is defined in an iterative process in which the pulse function is altered and the cost parameters determined until an acceptable balance of cost parameters is achieved.
3. A method according to claim 1 or 2 wherein the method comprises the step of weighting the respective cost parameters.
4. A method according to claim 3 wherein an acceptable balance between the cost parameters is achieved by optimizing the respective costs with the respective weightings.
5. A method according to claim 4 wherein the optimization is performed using an optimizer computer programme.
6. A method according to any one of the preceding claims wherein the cost parameters are selected from one or more of the group including power efficiency, spectral efficiency, bit error rate, AFC, Nyquist, and energy.
7. A pulse function generator for converting a data stream in accordance with a pulse function shaped in accordance with the relationship defined by the method of any preceding claim.

8. A modulator for providing a signal for transmission in a telecommunication system comprising:

means for shaping a data stream in accordance with the pulse function generator of claim 7.

9. A modulator according to claim 8 wherein the means for shaping comprises a filter.

10. A modulator according to claim 8 wherein the means for shaping comprises a look-up table.

11. A transceiver for a communication device comprising a modulator in accordance with any one of claims 8 to 10 and a demodulator.

12. A communication device operable in communication system comprising a transceiver according to claim 11.

13. A modulator for providing a signal for transmission in a TDMA telecommunications system in which a channel is a combination of frequency and timeslot in accordance with a predetermined modulation scheme wherein the data stream is shaped in accordance with a pulse generator of claim 7 prior to Modulation with a carrier signal.

14. A modulator for providing a signal for transmission in a CDMA telecommunications system in accordance with a predetermined modulation scheme, wherein the data stream is shaped in accordance with a pulse generator of claim 7 prior to modulation with a carrier signal.

15. A modulator is claimed in claim 13 or 14, wherein the modulation scheme is MSK.

6. A modulator as claimed in claim 13 or 14, wherein the modulation scheme is MSK.

17. A dual mode communication device operable in a first mode in a TDMA telecommunications system in which a channel is a combination of frequency and timeslot and a second mode in a CDMA telecommunications system, comprising a modulator for modulating a data stream with a carrier signal in accordance with a predetermined modulation scheme in both the first and second modes of operation and a pulse function generator for shaping a data stream in accordance with respective pulse functions responsive to the mode of operation of the radio telephone.

18. A dual mode communication device operable in a first mode when a first set of cost parameters are desired and in a second mode when a second set of cost parameters are desired, the radiotelephone comprising:

a first pulse function generator for converting a data stream in accordance with a pulse function shaped in dependence on the first set of desired cost parameters;

a second pulse function generator for converting a data stream in accordance with a pulse function shaped in dependence on the second set of desired cost parameters; and

means for selecting the pulse function generator in accordance with the mode of operation of the phone;

wherein at least one of the pulse functions is shaped in accordance with the relationship defined by the method of any of claims 1 to 6.

19. A communication device as claimed in claim 18, which is operable at a first data rate in the first mode and a second data rate in the second mode.

20. A communication device as claimed in claim 19, wherein the first data rate supports voice applications and the second data rate supports data applications.

21. A communication device as claimed in any of claims 18 to 21, operable in a TDMA telecommunications system.

22. A communication device as claimed in any of claims 18 to 20, wherein the first pulse function generator generates a pulse of Gaussian shape.

23. A dual mode communication device operable in a first mode when a first set of cost parameters are desired and in a second mode when a second set of cost parameters are desired, the radiotelephone comprising:

- a modulator for modulating a data stream with a carrier signal in accordance with a predetermined modulation scheme in both the first and second modes of operation;

- a first pulse function generator for shaping a data stream in accordance with a pulse function shaped in dependence on the first set of desired cost parameters;

- a second pulse function generator for shaping a data stream in accordance with a pulse function shaped in dependence on the second set of desired cost parameters; and

- means for selecting the pulse function generator in accordance with the mode of operation of the phone.

24. A method for selecting a modulation scheme for a communication system, the method comprising:

- defining a pulse function for a first modulation scheme in accordance with the method as claimed in any of claims 1 to 7;

- defining a pulse function for a second modulation scheme for the same desired cost parameters;

- determining the resultant cost parameters for each scheme; and

- selecting the modulation scheme which gives good resultant cost parameters given the desired ones.

25. A method for defining the relationship between frequency and amplitude of a pulse function for acting on a data stream for transmission in a communication

system in accordance with a modulation scheme, substantially as hereinbefore described with reference to, and/or as illustrated in any one, or any combination of the figures of the accompanying drawings.

26. A method for selecting a modulation scheme substantially as hereinbefore described with reference to, and/or as illustrated in any one, or any combination of the figures of the accompanying drawings.

27. A pulse function generator substantially as hereinbefore described with reference to, and/or as illustrated in any one, or any combination of the figures of the accompanying drawings.

28. A modulator for providing a signal for transmission in a communication system substantially as hereinbefore described with reference to, and/or as illustrated in any one, or any combination of the figures of the accompanying drawings.

29. A transmitter and/or receiver for a radiotelephone substantially as hereinbefore described with reference to, and/or as illustrated in any one, or any combination of the figures of the accompanying drawings.

30. A radiotelephone substantially as hereinbefore described with reference to, and/or as illustrated in any one, or any combination of the figures of the accompanying drawings.

AbstractA radio telephone

A method is provided for defining a pulse function shape for acting on a data stream for transmission in a telecommunication system in accordance with a predetermined modulation scheme. The method comprises defining desired cost parameters (e.g. error functions for amplitude, BER, bandwidth, energy, AFC) and defining the shape of the pulse function in dependence of the desired cost parameters. A pulse generator, modulator and communications device using such a defined device are also provided.

[Fig. 1]

CDMA
TRANSMITTER

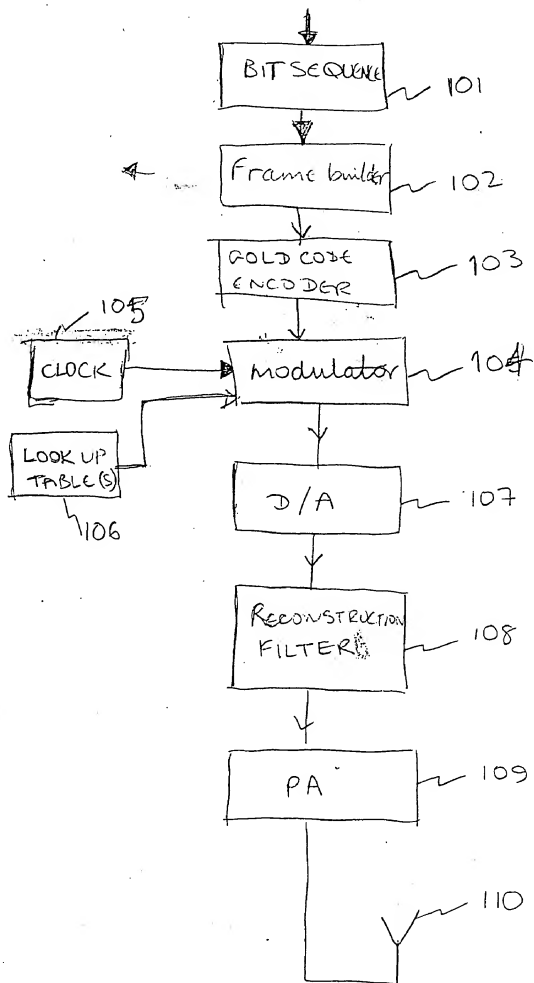


FIGURE 1

GSM
TRANSMITTER


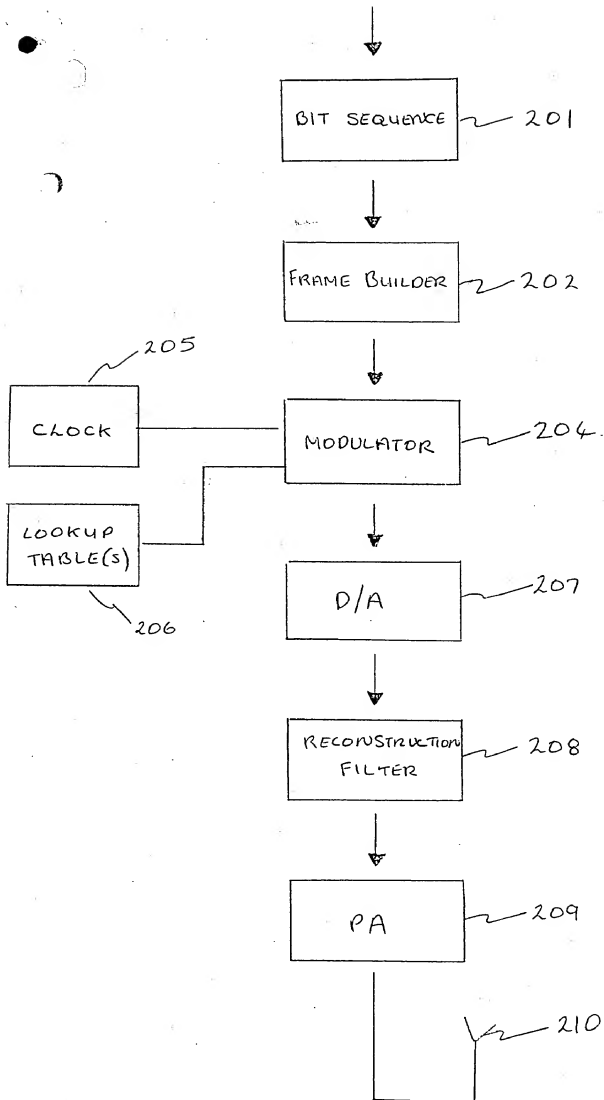


FIGURE 2 (a)

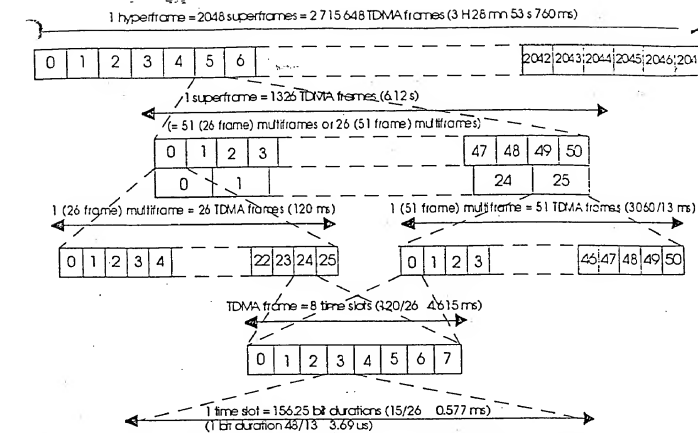

Normal burst (NB)	TB 3	Encrypted bits 58	Train. seq. 26	Encrypted bits 58	TB 3	GP 8.25	TB: Tail bits GP: guard period
Frequency correction burst (FB)	TB 3	Fixed bits 142				TB 3	GP 8.25
Synchronization burst (SB)	TB 3	Encrypted bits 39	Synchronization seq. 64	Encrypted bits 39	TB 3	GP 8.25	
Access burst (AB)	TB 3	Synchronization sequence (41)	Encrypted bits 36	TB 3	GP G8.25		

GSM FRAME STRUCTURE

FIG 2(b)

ENHANCED
GSM
TRANSMITTER

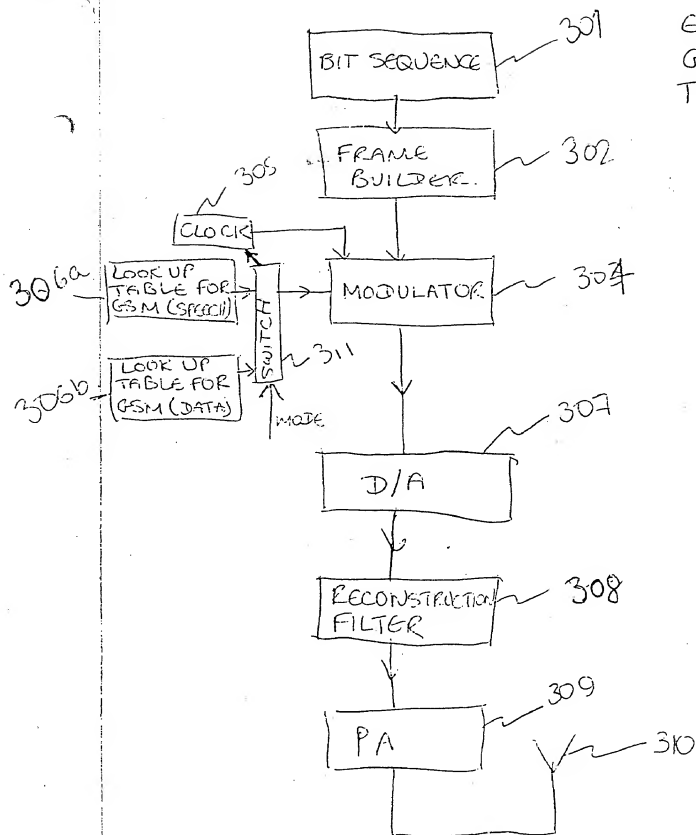
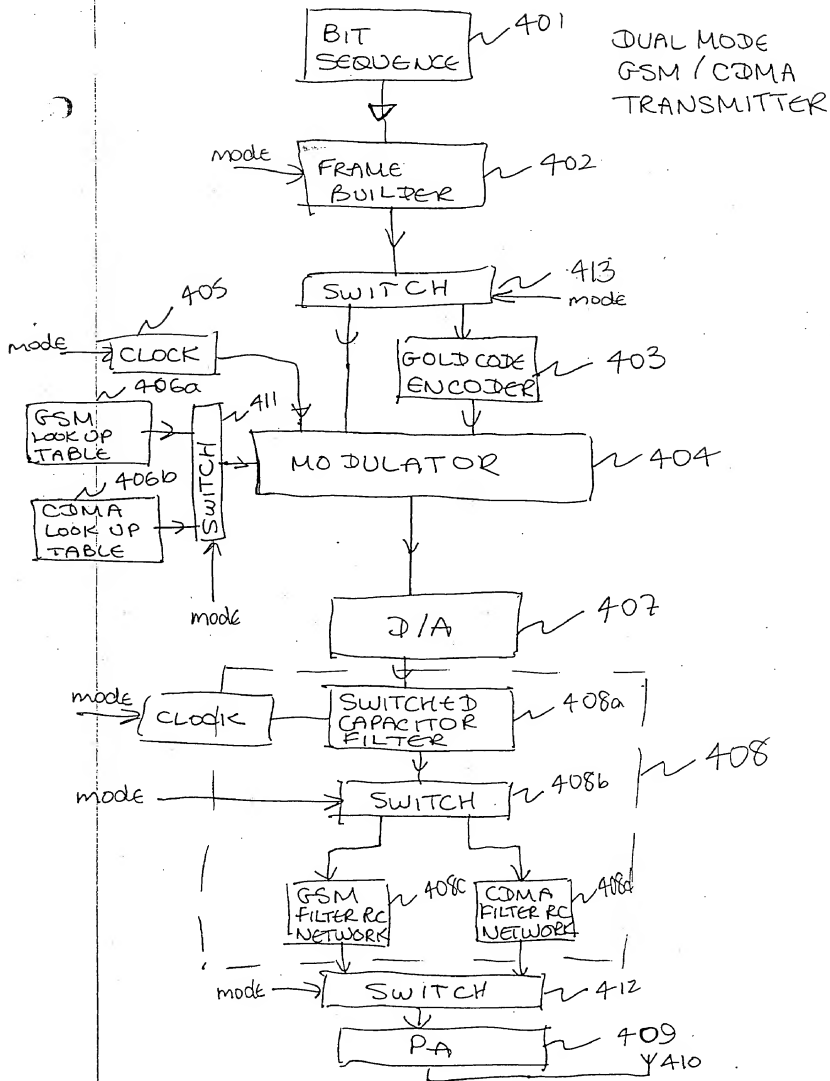


FIGURE 3.

FIGURE 4



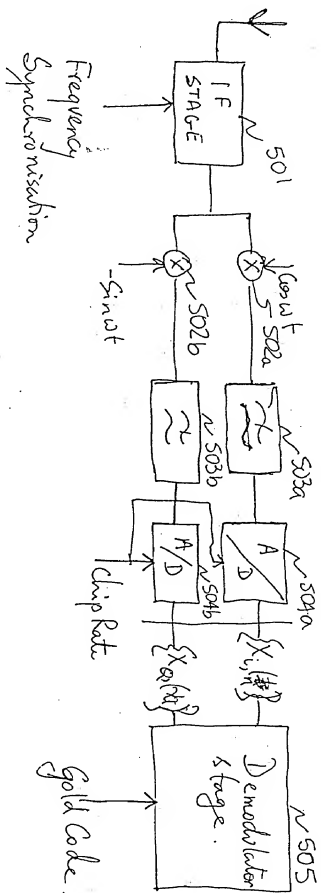


FIGURE 5